

RADIONIC


INDUSTRIES, INC.

NEW 8-13W T5 BALLAST ELECTRONIC BALLAST

NORMAL POWER FACTOR

For Use with (1) or (2) F8T5/F13T5 Lamps

LOW PROFILE 1" X .90"

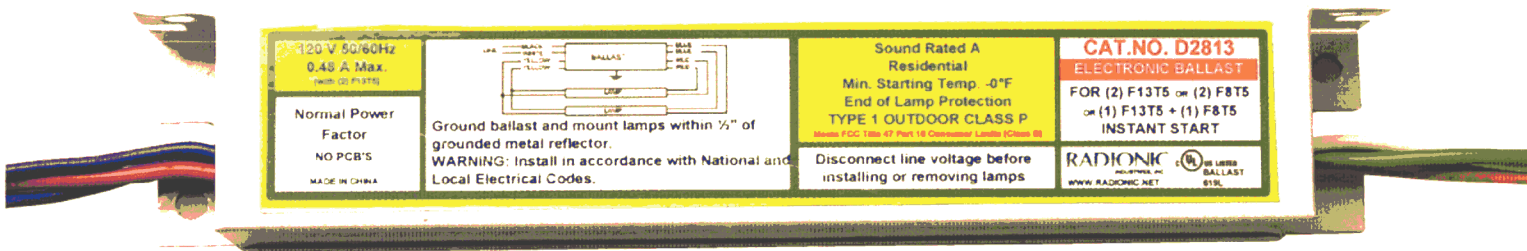

Key Benefits

- VALUE-PRICED
- FCC-B
- 2-YEAR WARRANTY
- CLASS P
- cULus LISTED


Features

- 120V, 50/60 Hz
- NPF > 50%
- CREST FACTOR < 1.7
- STARTING TEMP: 0° F
- END OF LIFE (EOL) PROTECTION
- SOFT START

Catalog Number	Input Voltage	Lamp Type	Rated Lamp (W)	Lamp Qty	(Max.) Input Watts	(Max.) Line Amps	Ballast Factor	Power Factor	Crest Factor
D1813	120V AC 50/60 Hz	F8T5	8	1	11.1	0.22	1.1	> 0.50	< 1.7
		F13T5	13	1	16.4	0.30	0.95	> 0.50	< 1.7
D2813	120V AC 50/60 Hz	F8T5	8	2	20.8	0.37	1.0	> 0.50	< 1.7
		F13T5	13	2	28.5	0.48	0.88	> 0.50	< 1.7
		F8T5 + F13T5	8 + 13	1 + 1	25.1	0.43		> 0.50	< 1.7

Enclosure Dimension (inches)

Length (L)	Width (W)	Height (H)	Mounting (M)
5.90	1.02	0.90	5.51

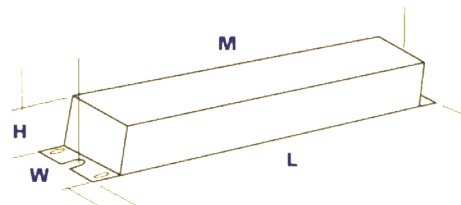

6625 W. Diversey Ave. • Chicago, IL 60707
ph 773/804-0100 • fx 773/804-0180

www.Radionic.net