


# RADIONIC INDUSTRIES, INC.

Customer Part #:	
Vendor:	RADIONIC
R.I. Catalog #:	E126K
Start method:	RAPID
Connection type:	LEADS
Input voltage:	120VAC, 50/60Hz
Lamp Configuration	N/A

## Electrical Specifications:

Lamp Class	LPS #	Rated Lamp (W)	Min. Start Temp (F)	Ballast Factor	Input Current (A)	Input Power (W)	Power Factor	MAX LCCF	MAX % THD
CFQ26W/G24q CFM26W/GX24q	1	26	0	0.88	0.42	25	>0.5	1.6	120


## Wiring Diagram

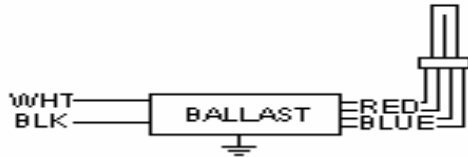

Lead Length (inches)

Black	10
White	10
Green	N/a
Blue	12
Red	12
Yellow	N/a

## Enclosure Drawing

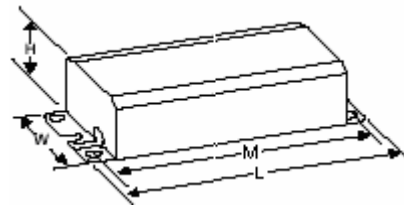

Enclosure Dimension (inches)

Length (L)	Width (W)	Height (H)	Mounting (M)
3.89	1.97	1.12	3.50

## NOTES:

1. CONFORMS TO ANSI C62.41-1993 FOR TRANSIENT PROTECTION.
2. CLASS P, SOUND RATED A
3. CONFORMS TO FCC, PART 18, CLASS B FOR RESIDENTIAL APPLICATIONS

Safety	UL	CSA	CE	cULus	Other
Control No.				E14926	

These are test results under laboratory conditions. Performance parameters may vary depending on field conditions. Specifications are subject to change without notice. See our complete warranty for details.