


ELECTRONIC BALLAST CFL RESIDENTIAL - NPF

For Use with (1) CFL 13, 18, 26
Or (2) CFL 13, 26 Watt

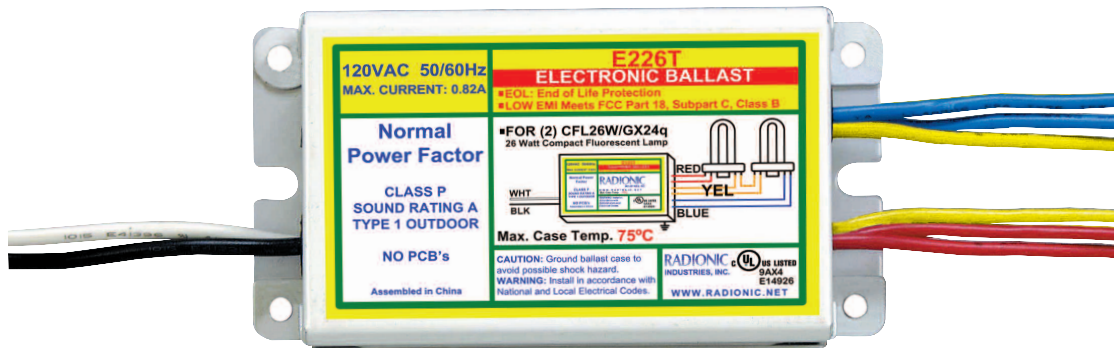

Key Benefits

- VALUE-PRICED
- FCC-B
- 2-YEAR WARRANTY
- CLASS P
- UL / CUL LISTED
- BALLAST FACTOR: 0.88

Features


- 120V, 50/60 Hz
- NPF > 50%
- CREST FACTOR < 1.7
- STARTING TEMP: 0° F
- END OF LIFE (EOL) PROTECTION

Catalog Number	Input Voltage	Lamp Type	Rated Lamp (W)	Lamp Qty	(Max.) Input Watts	(Max.) Line Amps	Ballast Factor	Power Factor	Crest Factor
E113T	120V AC 50/60 Hz	CFQ13W/G24q	13	1	15	0.24	> 0.88	> 0.5	< 1.7
E213T	120V AC 50/60 Hz	CFQ13W/G24q	26	2	32	0.47	> 0.88	> 0.5	< 1.7
E118T	120V AC 50/60 Hz	CFQ18W/G24q	18	1	20	0.32	> 0.88	> 0.5	< 1.7
E126T	120V AC 50/60 Hz	CFM26W/G24q	26	1	30	0.45	> 0.88	> 0.5	< 1.7
E226T	120V AC 50/60 Hz	CFM26W/G24q	52	2	57	0.82	> 0.88	> 0.5	< 1.7

Mounting Studs (-S) or Bottom Lead Wires (BL) available

Enclosure Dimension (inches)

Length (L)	Width (W)	Height (H)	Mounting (M)
3.86	2.00	1.14	3.60



6625 W. Diversey Ave. • Chicago, IL 60707
ph 773/804-0100 • fx 773/804-0180

www.Radionic.net