


RADIONIC

INDUSTRIES, INC.

ELECTRONIC BALLAST 1 & 2 LAMP

RESIDENTIAL - NPF
RAPID START

For Use with F17T8, F15T8, F20T8 and
F20T12 Lamps

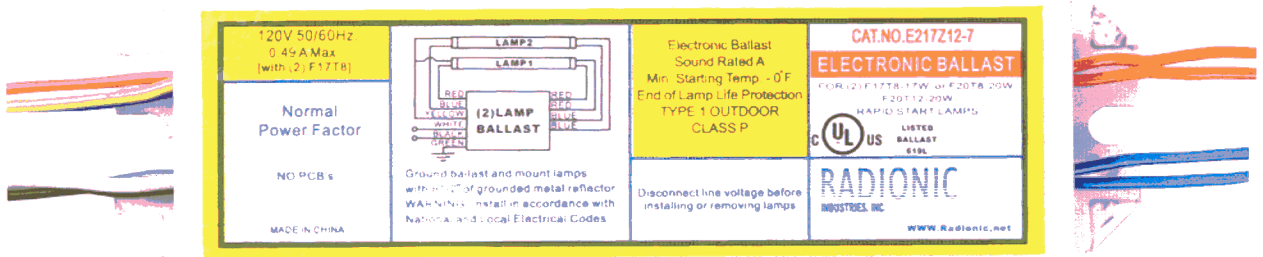

Key Benefits

- VALUE-PRICED
- FCC-B
- ENERGY STAR
- 2-YEAR WARRANTY
- CLASS P
- UL / CUL LISTED


Features

- 120V, 50/60 Hz
- NPF > 50%
- THD < 130%
- CREST FACTOR < 1.7
- STARTING TEMP: 0° F
- MULTI-LAMP DESIGN
- END OF LIFE (EOL) PROTECTION

Catalog Number	Input Voltage	Lamp Type	Rated Lamp (W)	Lamp Qty	(Max.) Input Watts	(Max.) Line Amps	Ballast Factor	Power Factor	Crest Factor
E217Z12-7	120V AC 50/60 Hz	F17T8	17	2	30.0	0.42	0.88	> 0.5	< 1.7
		F20T8	20	2	27.0	0.37	0.88	> 0.5	< 1.7
		F20T12	20	2	27.4	0.38	0.88	> 0.5	< 1.7
E217Z12-15	120V AC 50/60 Hz	F15T8	15	2	25.1	0.36	0.88	> 0.5	< 1.7
		F20T8	20	2	27.0	0.37	0.88	> 0.5	< 1.7
		F20T12	20	2	27.4	0.38	0.88	> 0.5	< 1.7
E117Z12-15	120V AC 50/60 Hz	F15T8	15	1	16.3	0.25	0.95	> 0.5	< 1.7
		F17T8	17	1	18.7	0.27	0.95	> 0.5	< 1.7
		F20T8	20	1	18.1	0.27	0.95	> 0.5	< 1.7
		F20T12	20	1	17.8	0.26	0.95	> 0.5	< 1.7

Enclosure Dimension (inches)

Length (L)	Width (W)	Height (H)	Mounting (M)
6.56	1.75	1.00	6.00

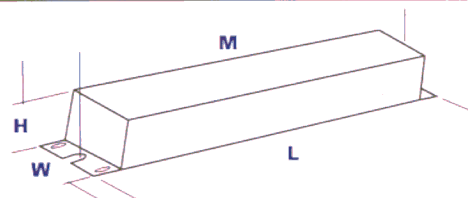

6625 W. Diversey Ave. • Chicago, IL 60707
ph 773/804-0100 • fx 773/804-0180

www.Radionic.net