



ELECTRONIC BALLAST-1 & 2 Light
RESIDENTIAL - NPF
RAPID START
FOR USE WITH F17T8, F15T8, F20T8, F20T12

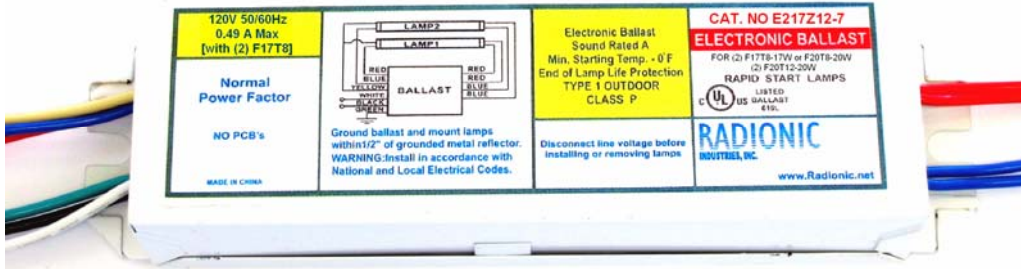

Key Benefits	Features
<ul style="list-style-type: none"> • VALUE PRICED • FCC-B • ENERGY STAR • 2 YEAR WARRANTY • CLASS P • cULus LISTED 	<ul style="list-style-type: none"> • 120V, 50/60 Hz • MULTI-LAMP TYPE DESIGN • CREST FACTOR < 1.7 • THD < 130% • NORMAL POWER FACTOR: > 50% • MINIMUM STARTING TEMP: 0° F • END OF LIFE (EOL) PROTECTION

Catalog Number	Input Voltage	Lamp Type	Rated Lamp (W)	Lamp Qty	(Max.) Input Watts	(Max.) Line Amps	Ballast Factor	Power Factor	Crest Factor
E217Z12-7	120VAC 50/60 Hz	F17T8	17	2	30.0	0.42	0.88	> 0.5	< 1.7
		F20T8	20	2	27.0	0.37			
		F20T12	20	2	27.4	0.38			
E217Z12-15	120VAC 50/60 Hz	F15T8	15	2	25.1	0.36	0.88	> 0.5	< 1.7
		F20T8	20	2	27.0	0.37			
		F20T12	20	2	27.4	0.38			
E117Z12-15	120VAC 50/60 Hz	F15T8	15	1	16.3	0.25	0.95	> 0.5	<1.7
		F20T8	20	1	18.1	0.27			
		F20T12	20	1	17.8	0.26			

Enclosure Dimension (inches)			
Length (L)	Width (W)	Height (H)	Mounting (M)
6.56	1.75	1.00	6.00

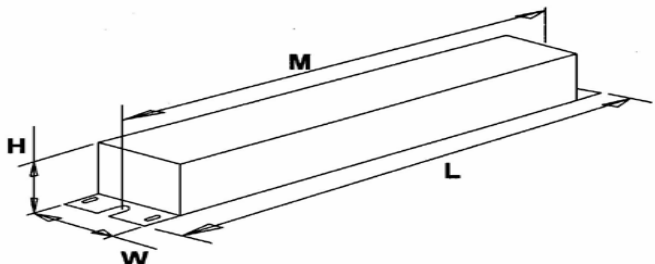

6625 W. Diversey Ave.
Chicago, IL 60707

Phone: 773-804-0100

Fax: 773-804-0180

www.Radionic.net