


RADIONIC INDUSTRIES, INC.

| | |
|--------------------|----------------------|
| Customer Part #: | |
| Vendor: | RADIONIC |
| R.I. Catalog #: | E432-N12 |
| Start method: | INSTANT |
| Connection type: | LEADS |
| Input voltage: | 120±10%, 50/60Hz |
| Lamp Configuration | Independent Parallel |

Electrical Specifications:

| Lamp Class | LPS # | Rated Lamp (W) | Min. Start Temp (F) | B.F. % | Input Power (W) | Input Current (A) | Power Factor | MAX LCCF | MAX % THD |
|------------|-------|----------------|---------------------|--------|-----------------|-------------------|--------------|----------|-----------|
| F32T8 | 4 | 32 | 0 | 0.88 | 118.8 | 1.8 | 0.55 | 1.5 | 90 |
| F25T8 | 4 | 25 | 0 | 0.90 | 87.4 | 1.4 | 0.52 | | |
| F17T8 | 4 | 17 | 0 | 0.95 | 62.4 | 1.0 | 0.52 | | |
| F32T8 | 3 | 32 | 0 | 0.95 | 68.6 | 1.1 | 0.52 | | |
| F25T8 | 3 | 25 | 0 | 1.02 | 54.9 | 0.88 | 0.52 | | |
| F17T8 | 3 | 17 | 0 | 1.06 | 45.0 | 0.72 | 0.52 | | |

Wiring Diagram

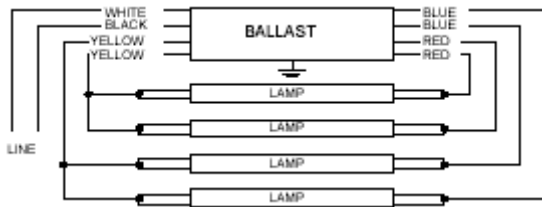


For 3 lamp operation insulate one blue lead wire

Lead Length (inches)

| | |
|--------|----|
| Black | 25 |
| White | 25 |
| Blue | 34 |
| Red | 34 |
| Yellow | 48 |

Enclosure Drawing

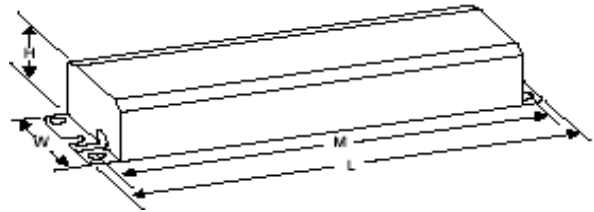

Enclosure Dimension (inches)

| Length (L) | Width (W) | Height (H) | Mounting (M) |
|------------|-----------|------------|--------------|
| 9.45 | 1.69 | 1.18 | 8.86 |

NOTES:

1. CONFORMS TO FCC, PART 18, CLASS B FOR RESIDENTIAL APPLICATIONS
2. CONFORMS TO ANSI C62.41-1993 FOR TRANSIENT PROTECTION.
3. CONFORMS TO ANSI C82.11
4. ENERGY STAR APPROVED
5. CLASS P, SOUND RATED A

| | | | | | |
|-------------|----|-----|----|--------|-------|
| Safety | UL | CSA | CE | cULus | Other |
| Control No. | | | | E14926 | |

These are test results under laboratory conditions. Performance parameters may vary depending on field conditions. Specifications are subject to change without notice. See our complete warranty for details.