



ELECTRONIC BALLAST UNIVERSAL INPUT VOLTAGE 120-277 VOLT

For Use with 14-21-28-35 T5 Lamps



Key Benefits

- **LOW .67" CAN PROFILE**
- **5-YEAR WARRANTY**
- **CLASS P**
- **UL / CUL LISTED**
- **COMMERCIAL/INDUSTRIAL**


Features

- **UNIVERSAL INPUT:** 120-277V, 50/60 Hz
- **PROGRAMMED START**
- **HIGH POWER FACTOR**
- **THD < 12%**
- **STARTING TEMP:** 0° F
- **MULTI-LAMP DESIGN**
- **END OF LIFE (EOL) PROTECTION**

Catalog Number	Input Voltage	Lamp Type	Rated Lamp (W)	Lamp Qty	(Max.) Input Watts	(Max.) Line Amps	Ballast Factor	Power Factor	Crest Factor
EU135PH-C	120-277V	F14T5	14	1	60.4	17.9	1.00	> 0.90	< 1.7
		F21T5	21	1	52.2	27.2	1.06	> 0.90	< 1.7
		F28T5	28	1	50.0	35.9	1.03	> 0.90	< 1.7
		F35T5	35	1	52.2	42.5	1.00	> 0.90	< 1.7
EU235PH-C	120-277V	F14T5	14	2	34.5	0.29	1.02	> 0.90	< 1.7
		F21T5	21	2	50.4	0.42	1.00	> 0.90	< 1.7
		F28T5	28	2	67.6	0.56	1.00	> 0.90	< 1.7
		F35T5	35	2	82.5	0.69	1.00	> 0.90	< 1.7

Enclosure Dimension (inches)

	Length (L)	Width (W)	Height (H)	Mounting (M)
PH-C-LP	12.20	0.98	0.67	11.90
PH-C	14.22	1.15	0.95	13.75

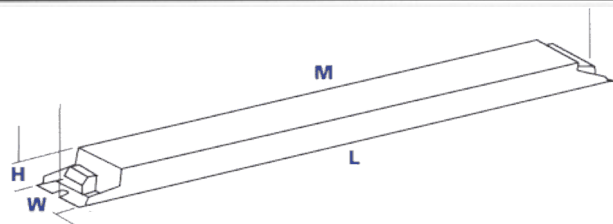

6625 W. Diversey Ave. • Chicago, IL 60707
ph 773/804-0100 • fx 773/804-0180

www.Radionic.net