


RADIONIC
INDUSTRIES, INC.

ELECTRONIC BALLAST UNIVERSAL INPUT VOLTAGE

120-277 VOLT, HIGH POWER FACTOR

For Use with CFL13W, 18W, 26W, 32W, 42W
or FT lamps

New
ValueStar
Ballast

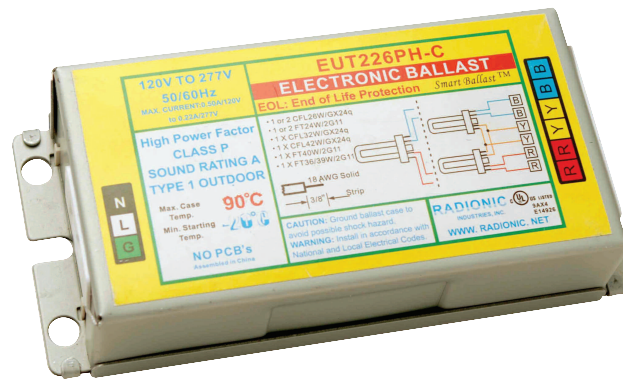

Key Benefits

- SOUND RATING CLASS A
- 5-YEAR WARRANTY
- CLASS P
- UL / CUL LISTED
- PROGRAMMED START
- FCC CLASS A FOR COMMERCIAL APPL.

Features

- 120 V, 50/60 Hz
- MULTI-LAMP DESIGN
- POWER FACTOR > 90%
- BALLAST FACTOR > 0.9
- END OF LIFE (EOL) PROTECTION
- THD < 12%
- MAXIMUM CASE TEMP 90° C

(see reverse side of page for product specifications)

6625 W. Diversey Ave. • Chicago, IL 60707
ph 773/804-0100 • fx 773/804-0180

www.Radionic.net

Catalog Number	Input Voltage	Lamp Type	Rated Lamp (W)	Lamp Qty	(Max.) Input Watts @120 V	(Max.) Line Amps @120 V	Ballast Factor @120 V	Power Factor @120 V	Crest Factor @120 V
EUT213PH-C	120-277 V 50/60 Hz	CFL13W/GX24q	13	1	17.0	0.14	> 0.88	> 0.90	< 1.7
		CFL18W/GX24q	18	1	18.0	0.15	> 0.88	> 0.90	< 1.7
		CFT9W/2G7	13	1	11.0	0.94	> 0.88	> 0.90	< 1.7
		CFT13W/2GX7	13	1	12.0	0.10	> 0.88	> 0.90	< 1.7
		CFL13W/GX24q	13	2	29.0	0.24	> 0.88	> 0.90	< 1.7
		CFL18W/GX24q	18	2	33.5	0.28	> 0.88	> 0.90	< 1.7
		CFT9W/2G7	9	2	21.0	0.18	> 0.88	> 0.90	< 1.7
		CFT13W/2GX7	13	2	23.0	0.19	> 0.88	> 0.90	< 1.7
EUT226PH-C	120-277 V 50/60 Hz	CFL26W/GX24q	26	1	29.5	0.25	> 0.9	> 0.90	< 1.7
		CFL32W/GX24q	32	1	31.0	0.26	> 0.9	> 0.90	< 1.7
		CFL42W/GX24q	42	1	48.0	0.40	> 0.9	> 0.90	< 1.7
		FT24W/2G11	24	1	26.0	0.22	> 0.9	> 0.90	< 1.7
		FT36/39W/2G11	36	1	32.0	0.27	> 0.9	> 0.90	< 1.7
		FT40W/2G11	40	1	44.1	0.37	> 0.9	> 0.90	< 1.7
		CFL26W/GX24q	26	2	58.0	0.49	> 0.9	> 0.90	< 1.7
		FT24W/2G11	24	2	50.5	0.42	> 0.9	> 0.90	< 1.7
EUT242PH-C	120-277 V 50/60 Hz	CFL32W/GX24q	32	1	32.0	0.27	> 0.88	> 0.90	< 1.7
		CFL42W/GX24q	42	1	45.0	0.37	> 0.88	> 0.90	< 1.7
		FT40W/2G11	40	1	45.0	0.37	> 0.88	> 0.90	< 1.7
		CFL32W/GX24q	32	2	56.0	0.46	> 0.88	> 0.90	< 1.7
		CFL42W/GX24q	42	2	88.0	0.73	> 0.88	> 0.90	< 1.7
		FT40W/2G11	40	2	83.0	0.67	> 0.88	> 0.90	< 1.7

Enclosure Dimension (inches)

Ballast	Length (L)	Width (W)	Height (H)	Mounting (M)
EUT213PH-C	4.2	2.4	1.0	3.8
EUT226PH-C	5.2	2.4	1.2	4.8
EUT242PH-C	5.2	3.0	1.5	4.8

