


ELECTRONIC BALLAST UNIVERSAL INPUT VOLTAGE 120-277 VOLT

For Use with F54T5 HO &
FT50/55W, FT36/39W PLL Lamps

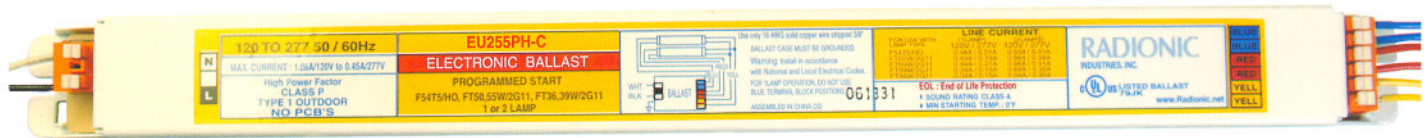

Key Benefits

- 5-YEAR WARRANTY
- CLASS P
- UL / CUL LISTED
- BALLAST FACTOR: 1.0


Features

- 120-277V, 50/60 Hz
- PROGRAMMED START
- HIGH POWER FACTOR
- THD < 10%
- MULTI-LAMP DESIGN
- CREST FACTOR < 1.7
- STARTING TEMP: 0° F
- END OF LIFE (EOL) PROTECTION

Catalog Number	Input Voltage	Lamp Type	Rated Lamp (W)	Lamp Qty	(Max.) Input Watts @ 120V	(Max.) Line Amps @ 120V	Ballast Factor @ 120V	Power Factor @ 120V	Crest Factor @ 120V
* EU155PH-C	120-277V	FT50/55W 2G11	50/55	1	59	0.53	1.00	0.99	1.7
	50/60 Hz	FT36/39W 2G11	36	1	41	0.35	1.00	0.99	1.7
		F54T5	54	1	59	0.53	1.00	0.99	1.7
* * EU255PH-C	120-277V	FT50/55W 2G11	50/55	1 or 2	107	0.90	1.00	0.99	1.7
	50/60 Hz	FT36/39W 2G11	36	1 or 2	78	0.66	1.00	0.99	1.7
		F54T5	54	1 or 2	115	1.00	1.00	0.99	1.7

Enclosure Dimension (inches)

	Length (L)	Width (W)	Height (H)	Mounting (M)
*	14.22	1.15	0.95	13.75
* *	16.7	1.18	1.04	16.2

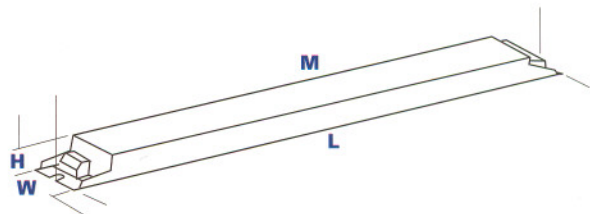

6625 W. Diversey Ave. • Chicago, IL 60707
ph 773/804-0100 • fx 773/804-0180

www.Radionic.net