


HYBRID BALLAST

(ELECTRONIC START)

Fits in all the places you use a core & coil preheat ballast, but no starter required.

For Use with F15T8/T12, F17T8, F18T8 and F20T8/12

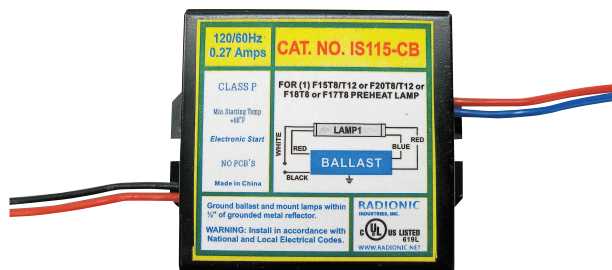

Key Benefits

- SMALL, COMPACT SIZE
- VALUE-PRICED
- UL / CUL LISTED

Features

- STARTING TEMP: +50° F
- END OF LIFE (EOL) PROTECTION

Catalog Number	Input Voltage	Lamp Type	Rated Lamp (W)	Lamp Qty	(Max.) Input Watts	(Max.) Line Amps	Power Factor	Crest Factor
IS115-CB	120V AC 60 Hz	F15T8	15	1	18	0.27A	> 0.51	< 1.70
		F15T12	15	1	21	0.27A	> 0.50	< 1.70
		F17T8	17	1	22	0.27A	> 0.50	< 1.75
		F18T8	18	1	22	0.27A	> 0.50	< 1.75
		F20T8	20	1	22	0.27A	> 0.50	< 1.75
		F20T12	20	1	23	0.27A	> 0.51	< 1.75

Enclosure Dimension (inches)

	Length (L)	Width (W)	Height (H)	Mounting (M)
IS115-CB	2.70	2.0	1.25	2.50

