


# RADIONIC INDUSTRIES, INC.

Customer Part #:	
Vendor:	RADIONIC
R.I. Catalog #:	DT113TP
Start method:	PREHEAT
Connection type:	LEADS
Input voltage:	120VAC
Frequency:	60Hz

## Production Specifications:

Lamp Class	LPS #	Rated Lamp (W)	Min. Start Temp (F)	B.F. %	Input (w) ANSI	B.E.F.	Input Current (RATED)	Power Factor	LCCF	% THD
F13T5	1	13	50	0.88	17	5.11	0.4A	0.50	1.47	<10

## Wiring Diagram

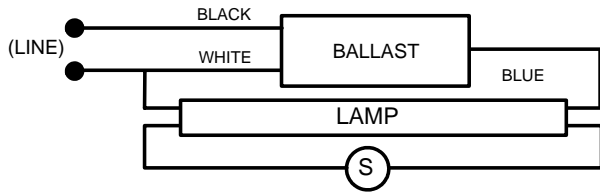


Lead Length (inches)  
Tolerance +/- 1"

Black	10
White	10
Blue	10
Red	
Yellow	
Gray	
Violet	

Yellow/Blue	
Blue/White	
Brown	
Orange	
Orange/Black	
Black/White	

## Enclosure Drawing

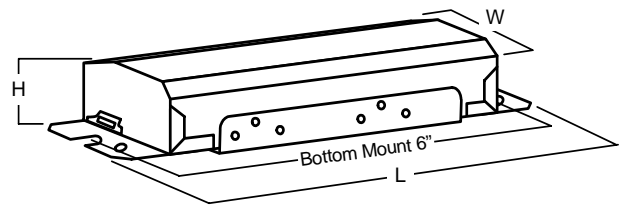

## Enclosure Dimension (inches)

Length (L):	Width (W):	Height (H):	Side Mounting (M):
6-1/2	1-7/8	15/16	2-3/8

Safety	UL	CSA	CE	CUL	Other
		LISTED		619L	

These are test results under laboratory conditions and are supplied without charge at your request. We do not guarantee the accuracy of these results, nor do we represent or warranty products to achieve these same results under field conditions. We recommend you repeat these tests before purchasing. See our complete warranty for details. mswrc\balspec-11/7/00