


# RADIONIC INDUSTRIES, INC.

Customer Part #:	
Vendor:	RADIONIC
R.I. Catalog #:	E232-N12
Start method:	INSTANT
Connection type:	LEADS
Input voltage:	120VAC, 50/60Hz
Lamp Configuration	Independent Parallel

## Production Specifications:

Lamp Class	LPS #	Rated Lamp (W)	Min. Start Temp (F)	B.F. %	Input (w)	B.E.F.	Input Current (RATED)	Power Factor	MAX LCCF	MAX % THD
FO17T8	1	17	0	1.19	20	5.95	0.44A	0.55	<1.7	150
FO25T8	1	25	0	1.17	28	4.17	0.52A	0.52	<1.7	150
FO32T8	1	32	0	1.14	34	3.35	0.64A	0.55	<1.7	150
FO17T8	2	17	0	0.93	30	3.1	0.58A	0.52	<1.7	150
FO25T8	2	25	0	0.90	44	2.04	0.74A	0.57	<1.7	150
FO32T8	2	32	0	0.87	59	1.47	1.0A	0.55	<1.7	150

### Wiring Diagram

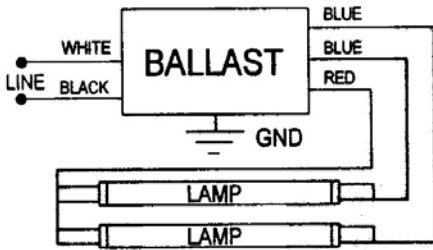


Lead Length (inches)  
Tolerance +/- 1"

Black	25
White	25
Blue X 2	34
Red	48
Yellow	
Gray	
Violet	

Yellow/Blue	
Blue/White	
Brown	
Orange	
Orange/Black	
Black/White	

### Enclosure Drawing

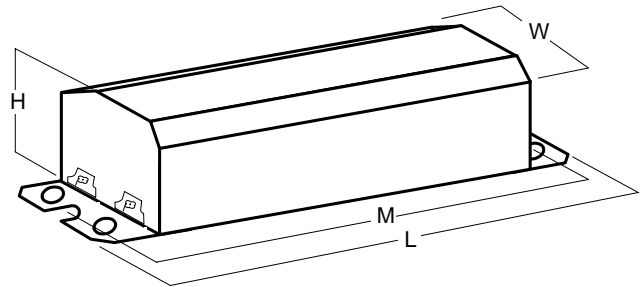

### Enclosure Dimension (inches)

Length (L):	Width (W):	Height (H):	Mounting (M):
6.45"	1.95"	1.35"	5.62"

### NOTES:

1. Conforms to FCC, part 18, Class B for residential applications.
2. Conforms to ANCI C62.41-1993 for transient protection.
3. Conforms to ANCI C82.11
4. Energy Star approved
5. Class P, sound rated A

Safety	UL	CSA	CE	cULus	Other
Control No.				79JK	

These are test results under laboratory conditions and are supplied without charge at your request. We do not guarantee the accuracy of these results, nor do we represent or warranty products to achieve these same results under field conditions. We recommend you repeat these tests before purchasing. See our complete warranty for details. MSWRC\balspec - 09/06/02, Revised: 04/03/03