



ELECTRONIC BALLAST RESIDENTIAL - NPF

For Use with (2) F32T8, F34/40T12,
F20T8/T12, F30T8/T9/T12, F25T8 OR F21T5



Key Benefits

- VALUE-PRICED
- LOW 1" CAN PROFILE
- FCC-B
- ENERGY STAR
- 2-YEAR WARRANTY
- CLASS P
- UL / CUL LISTED


Features

- 120V, 50/60 Hz
- MULTI-LAMP DESIGN
- CREST FACTOR < 1.7
- THD < 130%
- NPF > 50%
- STARTING TEMP: 0° F
- END OF LIFE (EOL) PROTECTION
- BALLAST FACTOR: 0.89
(WITH (2) 32T8)

Catalog Number	Input Voltage	Lamp Type	Rated Lamp (W)	Lamp Qty	(Max.) Input Watts	(Max.) Line Amps	Ballast Factor	Power Factor	Crest Factor
E232Z12-5	120V AC 50/60 Hz	F32T8	32	2	60.4	0.86	0.89	> .05	< 1.7
		F48" T12	40	2	52.2	0.77			
		F48" T12	34	2	50.0	0.74			
		F48" T12	25	2	52.2	0.77			
		F40T10	40	2	50.6	0.74			
		F20T8	20	2	41.4	0.65			
		F20T12	20	2	41.1	0.65			
		F30T8	30	2	50.0	0.75			
		F30T9	30	2	41.0	0.71			
		F30T12	30	2	48.0	0.74			
		F25T8	25	2	49.0	0.74			
F21T5	21	2	50.1	0.77					

Enclosure Dimension (inches)

Length (L)	Width (W)	Height (H)	Mounting (M)
6.56	1.75	1.00	6.00

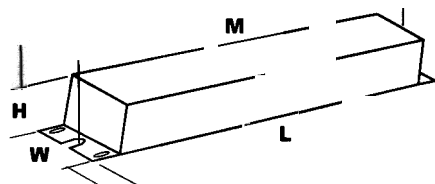

6625 W. Diversey Ave. • Chicago, IL 60707
ph 773/804-0100 • fx 773/804-0180

www.Radionic.net