


# RADIONIC INDUSTRIES, INC.

Customer Part #:	
Vendor:	RADIONIC
R.I. Catalog #:	ES240RTP
Start method:	RAPID
Connection type:	LEADS
Input voltage:	120VAC
Frequency:	60Hz

## Production Specifications:

Lamp Class	LPS #	Rated Lamp (W)	Min. Start Temp (F)	B.F. %	Input (w) ANSI	B.E.F.	Input Current (RATED)	Power Factor	LCCF	% THD
F40T12	2	40	50	0.66	64	1.07	0.58A	>0.95	1.35	<15
F40T12	2	34	60	0.65	53	1.22	0.58A	>0.95	1.6	<15
F40T12/U	2	40	50	0.66	64	1.07	0.58A	>0.95	1.35	<15
F40T12/U	2	34	60	0.66	53	1.22	0.58A	>0.95	1.6	<15

### Wiring Diagram

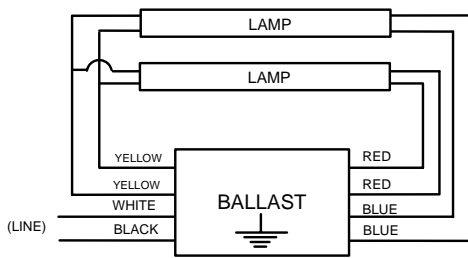


Lead Length (inches)  
Tolerance +/- 1"

Black	24
White	23
Blue X 2	26-1/2
Red X 2	26-1/2
Yellow X 2	37-1/2
Gray	
Violet	

Yellow/Blue	
Blue/White	
Brown	
Orange	
Orange/Black	
Black/White	

### Enclosure Drawing

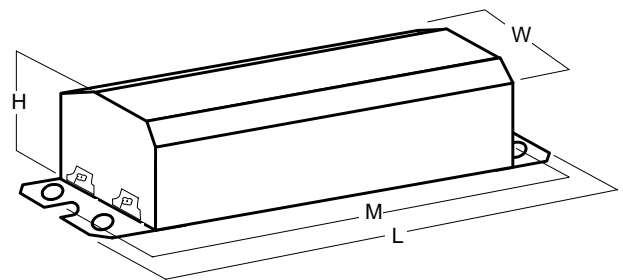

### Enclosure Dimension (inches)

Length (L):	Width (W):	Height (H):	Mounting (M):
9-7/16	2-5/16	1-9/16	8-7/8

Safety	UL	CSA	CE	CUL	Other
CLASS "P"				73XJ	

These are test results under laboratory conditions and are supplied without charge at your request. We do not guarantee the accuracy of these results, nor do we represent or warranty products to achieve these same results under field conditions. We recommend you repeat these tests before purchasing. See our complete warranty for details. msw\rc\balspec-11/9/00.